



Opcionalmente disponible
en versión ATEX.

! Adecuado también para funcionar
con nitrógeno.

Polipasto neumático de cadena modelo CPA

Capacidades 125 - 980 kg

Los polipastos neumáticos de cadena se caracterizan por su alta durabilidad y resistencia en un gran número de aplicaciones industriales. Su robusta pero ligera carcasa permite que su transporte sea sencillo.

Características

- Diseñado para presiones de funcionamiento de 5 a 7 bares.
- Motor de pistón giratorio con un factor de servicio del 100 % y un número ilimitado de arranques para un funcionamiento continuo.
- Interruptores limitadores de carrera superior e inferior integrados como estándar.
- Disco de freno de ajuste automático, libre de mantenimiento.
- Control extremadamente sensible con parada de emergencia para un posicionamiento preciso de la carga.
- Válvula de escape para el freno como estándar en los modelos CPA 2-31, CPA 5-17 y CPA 10-9.

Opcional

- Todos los carros manuales o motorizados se pueden conectar al gancho de suspensión de los polipastos neumáticos.
- Todos los modelos se pueden equipar con carros de empuje o de traslación por cadena.
- También están disponibles carros neumáticos integrados para los modelos CPA 2-31, CPA 5-17 y CPA 10-9.
- Los modelos CPA 2-31, CPA 5-17 y CPA 10-9 también están disponibles para su uso en áreas de peligro, categoría 2 (Zona 1/21).
- Los modelos CPA 2-31, CPA 5-17 y CPA 10-9 también están disponibles con cadena de mando.
- Kit de mantenimiento para el conducto principal de aire (regulador de presión, manómetro, engrasador y soporte).
- Recogedor de cadena

Aplicaciones

Industrias del automóvil y aeronáutica, astilleros, en barcos y puertos. Fundiciones, on-/offshore, fabricas y tiendas de pintura, refinerías, depósitos de petróleo. Imprentas, industrias textiles y alimentarias, almacenes de papel y cemento. Industrias del cristal y cerámica, industrias madereras, industrias químicas, plantas de tratamiento térmico y de energía, etc.

! ¡Para asegurar un funcionamiento sin fallos el
aire comprimido debe estar filtrado y engrasado!


Datos técnicos modelo CPA

Modelo	Núm. EAN 4025092*	Capacidad en kg/ número de ramales	Velocidad de elevación con carga nominal* m/min	Velocidad de elevación sin carga* m/min	Velocidad de bajada con carga nominal* m/min	Consumo de aire con carga nominal* m³/min	Motor kW	Peso con 3 m elevación kg
CPA 1-13	*911795	125/1	13,1	17,1	11,3	0,9	0,4	15,4
CPA 2-10	*911788	250/1	9,8	17,1	13,7	0,9	0,4	15,4
CPA 2-31	*911801	250/1	31,0	52,0	36,0	1,98	1,33	21,8
CPA 5-5	*911818	500/2	4,6	7,9	6,7	0,9	0,4	17,2
CPA 5-17	*911825	500/1	16,8	32,3	29,6	1,27	1,33	21,8
CPA 10-9	*911832	980/2	8,5	16,2	14,9	1,27	1,33	27,7


*Valores para 6.3 bares (presión del caudal de aire) y manguera de control de 2 m. Las velocidades se reducirán en caso de longitudes de la manguera de control mayores. Modelos CPA 1-13, CPA 2-10 y CPA 5-5 longitud máx. de manguera 12 m, modelos CPA 2-31, CPA 5-17 y CPA 10-9 longitud máx. de manguera 20 m.

Medidas modelo CPA

Modelo	CPA 1-13	CPA 2-10	CPA 2-31	CPA 5-5	CPA 5-17	CPA 10-9
A, mm	292	292	457	324	457	457
A1, mm	410	410	483	410	483	508
B, mm	21	21	25	14	25	27
C, mm	20	20	24	24	24	28
D, mm	16	16	26	14	26	28
F1, mm	90	90	130	90	130	130
F2, mm	120	120	180	120	180	180
K, mm	103	103	146	103	146	165
L, mm	57	57	102	57	102	83
M, mm	120	120	114	120	114	135
N, mm	50	50	54	50	54	25
Q1, mm	142	142	162	142	162	162
Q2, mm	183	183	181	183	181	181

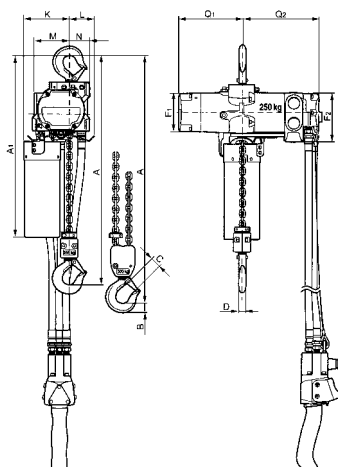

Modelo CPA 1-13 / 2-10 / 5-5

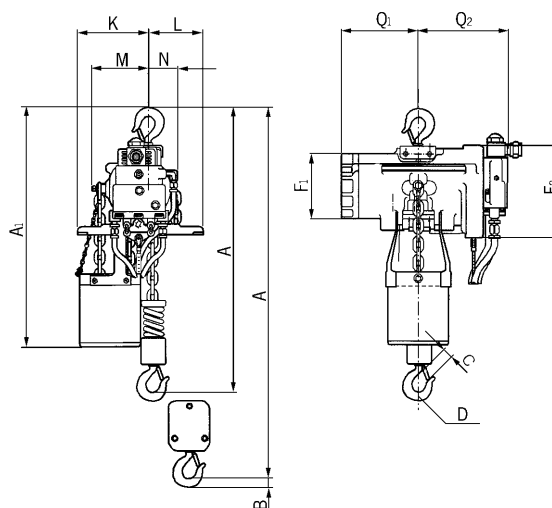

Modelo CPA 2-31 / 5-17 / 10-9



Polipasto neumático de cadena modelo CPA con gancho de suspensión o con carro integrado

Capacidades 2.000 - 10.000 kg

Este aparato sigue al diseño del modelo CPE.

Con 100 % de factor de servicio y con un número ilimitado de arranques, el modelo CPA es óptimo para aplicaciones pesadas. No le afecta ni la suciedad, ni la humedad ni los ambientes agresivos externos. Los polipastos de este modelo constan de tres componentes principales que hacen que su mantenimiento sea fácil y económico.

Características

- Diseñado para funcionar con presiones de 4 a 6 bares.
- Robusto motor de pistón giratorio con freno automático con resorte integrado que mantiene la carga segura incluso en el caso de fallo de la presión neumática.
- La caja de engranajes planetarios estándar lubricada con un baño de aceite hace que funcione de manera silenciosa y permite una altura perdida reducida.
- Par alto debido a las válvulas de encendido en el cuerpo del motor.
- Bajo nivel de emisión de ruidos gracias al silenciador de grandes dimensiones.
- Control sensible por botonera colgante de 2 o 4 botones con interruptor de parada de emergencia.
- Los modelos de hasta 3000 kg montan un solo ramal de cadena, reduciendo así la altura perdida.
- La nuez de cadena de cinco encajes, fabricada en acero cementado resistente al desgaste se acopla perfectamente a la cadena de carga para garantizar un movimiento de la cadena suave y preciso.
- Ganchos de suspensión y carga de acero de alta resistencia y están provistos de robustos gatillos de seguridad.
- La cadena cementada y galvanizada se ha adaptado especialmente a la nuez para evitar desgaste y incrementar la seguridad durante el trabajo con el polipasto. Cumple las normativas nacionales e internacionales.

Opcional

- Carros manuales y neumáticos.
- Control por cable de tracción manual
- Cadena de carga en acero inoxidable.

¡Para asegurar un funcionamiento sin fallos el aire comprimido debe estar filtrado y engrasado!

Datos técnicos modelo CPA

Modelo	Núm. EAN 4025092*	Capacidad en kg/ número de ramales	Velocidad de elevación con carga nominal* m/min	Velocidad de elevación sin carga* m/min	Velocidad de elevación con carga nominal* m/min	Motor kW	Peso** con gancho de suspensión kg	Peso** con carro de empuje kg	Peso** con carro de cadena kg	Peso** con carro neumático kg
CPA 20-8	*073868	2.000/1	7,4	9,9	11,0	2,6	121	184	188	199
CPA 30-6	*073875	3.000/1	6,0	9,9	13,0	3,2	121	184	188	199
CPA 40-4	*073882	4.000/2	3,7	5,0	5,5	2,6	140	202	206	218
CPA 50-3	*073899	5.000/2	3,4	5,0	6,0	3,0	140	202	206	218
CPA 60-3	*073905	6.000/2	3,0	5,0	6,5	3,2	140	202	206	218
CPA 75-2	*056915	7.500/3	2,0	3,3	4,3	3,2	–	–	–	–
CPA 100-3	*075701	10.000/4	3,4	5,0	6,0	2x3,0	–	–	–	–

*Valores para 6 bares (caudal de aire), consumo de aire con carga nominal 4.7 m³/min. CPA 100-3: 9.4 m³/min.

**Peso con altura de elevación estándar (3 m). Otras alturas de elevación disponibles bajo consulta.



Aplicación con carro neumático




Opcionalmente disponible en versión ATEX.

Datos técnicos de los carros

Capacidad kg	Tamaño	Ancho ala de viga b mm	Espesor ala de viga t máx. mm	Radio mín. curvatura m	Velocidad de traslación carro neumático m/min	Motor carro neumático kW
2.000 - 6.000	A	98 - 180	27	2,0	18	0,55
2.000 - 6.000	B	180 - 300	27	1,8	18	0,55
7.500 - 10.000	B	125 - 310	40	1,8	–	–


Otras capacidades disponibles bajo consulta.

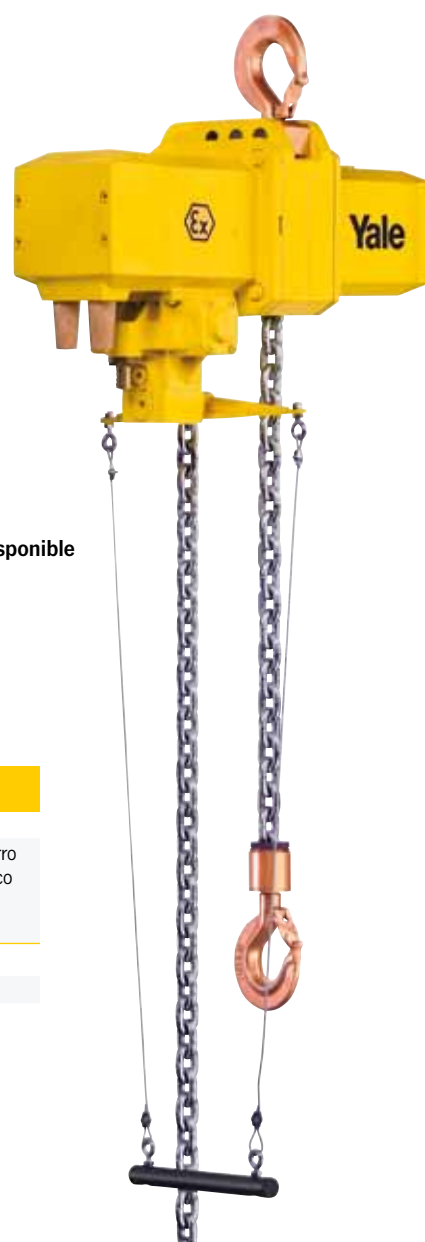


Equipos de elevación Polipasto neumático de cadena

Medidas modelo CPA

Modelo	CPA 20-8	CPA 30-6	CPA 40-4	CPA 50-3	CPA 60-3	CPA 75-2	CPA 100-3
A, mm	516	516	681	681	681	950	1.068
A1, mm	286	286	428	428	428	479	651
B, mm	35	35	45	45	47	60	60
C, mm	37	37	46	46	42	52	52
D, mm	24	24	30	30	30	40/45	40/45
F1, mm	160	160	160	160	160	160	160
F2, mm	165	165	165	165	165	165	165
G, mm	220	220	220	220	220	220	581
G1, mm	180	180	140	140	140	268	311
G2 (13 m), mm	258	258	218	218	218	-	-
G2 (21 m), mm	278	278	238	238	238	345	408
H1, mm	110	110	110	110	110	110	110
H2, mm	135	135	135	135	135	307	256
H3, mm	115	115	115	115	115	115	115
K1, mm	100	100	100	100	100	92	92
K2, mm	51	51	51	51	51	62	62
M, mm	50	50	9,6	9,6	9,6	139	181
N, mm	60	60	100	100	100	136	291
Q1, mm	272	272	272	272	272	272	272
Q2, mm	325	325	325	325	325	325	325

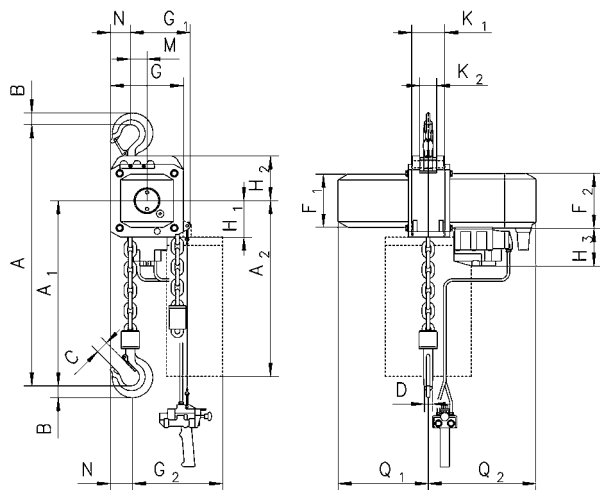


Modelo CPA con gancho de suspensión, 2.000 - 3.000 kg, un ramal

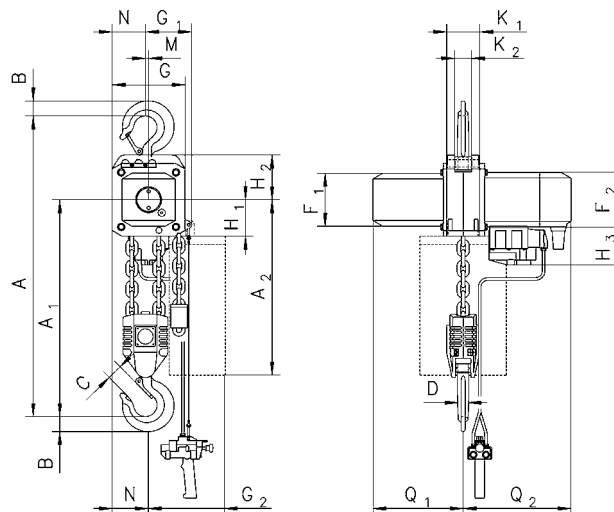

Modelo CPA con gancho de suspensión, 4.000 - 6.000 kg, dos ramales

Modelo	CPA 20-8	CPA 30-6	CPA 40-4	CPA 50-3	CPA 60-3	CPA 75-2	CPA 100-3
A2 (13 m), mm	430	430	430	430	430	–	–
A2 (21 m), mm	530	530	530	530	530	530	530
A4, mm	465	465	615	615	615	855	965
A5, mm	298	298	298	298	298	477	425
A6, mm	190	190	190	190	190	182	182
b, mm	A = 98 - 180/ B = 180 - 300	A = 98 - 180/ B = 180 - 300	A = 98 - 180/ B = 180 - 300	A = 98 - 180/ B = 180 - 300	A = 98 - 180/ B = 180 - 300	125 - 310	125 - 310
F, mm	150	150	150	150	150	113	113
l, mm	142,5	142,5	142,5	142,5	142,5	130	130
L1, mm	209	209	209	209	209	200	200
L2, mm	262,5	262,5	262,5	262,5	262,5	215	215
L3, mm	265	265	265	265	265	265	265
L4, mm	213	213	253	253	253	291	291
L5, mm	312	312	272	272	272	–	–
L6, mm	315	315	275	275	275	–	–
O, mm	125	125	125	125	125	150	150
P, mm	208	208	208	208	208	208	208
P1, mm	284	284	284	284	284	284	284
S, mm	b + 70	b + 70	b + 70	b + 70	b + 70	b + 98	b + 98
t, mm	27	27	27	27	27	40	40
T1 Tamaño A	182	182	182	182	182	–	–
T1 Tamaño B	242	242	242	242	242	270	270

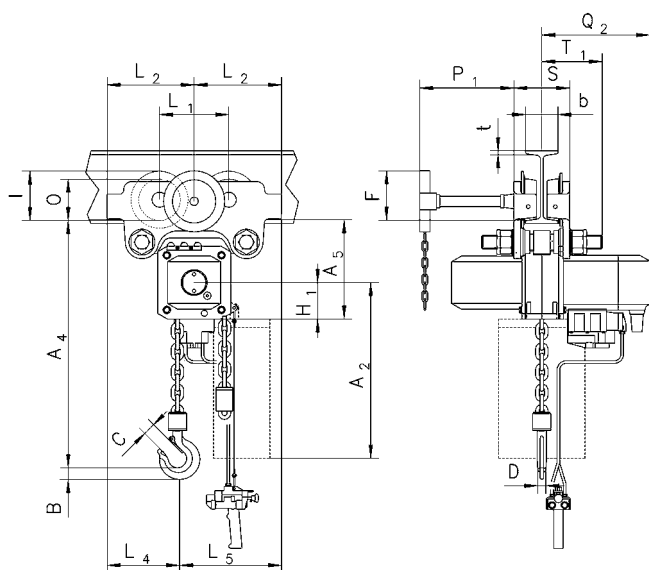[illegible]

Modelo CPA con carro neumático integrado

Yale Air Chain Hoist may be the best solution to your material-handling needs. Air hoists are ideal for many conditions that make electric hoists impractical. Yale Air Chain Hoists feature variable speed control, so expensive electrical controls are unnecessary.




Yale Air Hoist Advantages

- **Precise Load Spotting**
Lifting and lowering speeds are continuously variable from zero to maximum.
- **Operates In Extreme Heat**
The air hoist motor is designed for operation under conditions of relatively high ambient temperatures without need for special protection.
- **Higher Speeds**
For applications where speed is a critical factor in production, Yale air hoists provide very fast lowering speeds.
- **Free From Hazard of Electrical Shock**
Since compressed air is the power source, Yale Air Hoists have a distinct advantage over electrical shock hazards especially in wet locations.
- **Spark Resistant Features**
Spark resistant options allow air hoists to be used in areas where danger of combustion or explosion from atmospheric conditions exist.
- **Easier To Maintain**
There are no contactors, transformers, motor windings, fuses, etc. that are typical in electric hoists that need to be checked or replaced. As long as air going into the air motor is good and lubrication is supplied to the air motor, the Yale Air Hoist is very easy to maintain.



THE MOST FAMOUS NAME IN HOISTS.



Model KALC Air Hoists



- Die-cast aluminum frame - lightweight, rugged, holds shafts and bearings in close alignment.
- Gearing - combination of precision cut, heat-treated helical and spur gears for quiet, efficient operation.
- Mechanical load brake - positive action, spring biased Weston type load brake holds the load and provides exact load spotting and control.
- Overload protection device protects against excessive overloads...clutch also acts at upper and lower limits.
- Multi-vane rotary air motor - eight vanes provide high torque smooth operation, positive starting and excellent control.
- Internal Muffler - reduces sound level.
- Pendant control - pendant throttle handle is of the full flow design for excellent load spotting capabilities.
- Throttle valve - precision throttle valves meter the air for smooth operation.

Basic Hoist Data

Rated Loads

1, 2, and 3-ton (Spark resistant models are rated at 1/2, 1 and 2-ton).

Air Pressure Recommended

90 PSI

Air Consumption

70 SCFM (full load-full speed) slow speed model;
80 SCFM (full load-full speed) fast speed model.

Pendant Control Hose

6 foot pendant hose standard for 10 foot lift hoist, longer hose assemblies up to 36 foot available.

Lift

10 foot lifts are standard. Longer lifts are available.

Net Weight (Basic Hoist)

100 lbs.

Suspension

Hook or lug

Air Inlet Size

3/4 NPTF

Air Supply Hose Size

3/4 I.D. min.

Hook & Lug Suspension Specifications


Capacity	Model	Hoist Catalog #	Full Load Lift Speed	Full Load Lowering Speed	Parts of Chain	Net Weight
tons			*FPM	*FPM		in
1/2	Hook / Spark	911683	16	22	1	95
	Lug / Spark	911693				110
1	Hook / Standard	911644	13	18	1	93
		911641	30	42		95
	Hook / Spark	911684	8	11	2	112
		911654	13	18		106
	Lug / Standard	911651	30	42	1	108
		911694	8	11		120
2	Hook / Standard	911645	6	9	2	110
		911642	15	12		112
	Hook / Spark	911685	5	7	3	146
		911655	6	9		116
	Lug / Standard	911652	15	21	2	118
		911695	5	7		170
3	Hook / Standard	911646	4	6	3	144
		911643	10	14		146
	Lug / Standard	911656	4	6		164
		911653	10	14		166

*Hoist speeds based on 90 PSI line pressure with full rated hoist load


Hook Suspension Specifications & Dimensions

Capacity	Model	Hoist Catalog #	A	B	C	D	E	H	X	Y
tons			in	in	in	in	in	in	in	in
1/2	Hook / Spark	911683	16-1/2	11-7/16	6-5/8	2-15/16	6-3/8	7/16	27-13/16	9-11/16
1	Hook / Standard	911644	16-1/2	11-17/16	6-5/8	2-15/16	6-3/8	7/16	27-13/16	9-11/16
		911641								
	Hook / Spark	911684	22	13-1/8	7-15/16	4-9/16	5-1/16	3/16	29-1/2	11
2	Hook / Standard	911645	22	13-1/8	7-15/16	4-9/16	5-1/16	3/16	29-1/2	11
		911642								
	Hook / Spark	911685	24-7/8	14-3/8	9-3/8	5-7/8	7-1/8	1/4	30-3/4	12
3	Hook / Standard	911646	24-7/8	14-3/8	9-3/8	5-7/8	7-1/8	1/4	30-3/4	12
		911643								

Hook Suspension

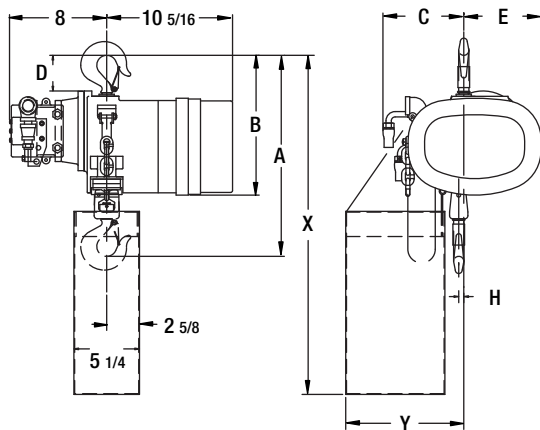

Lug Suspension

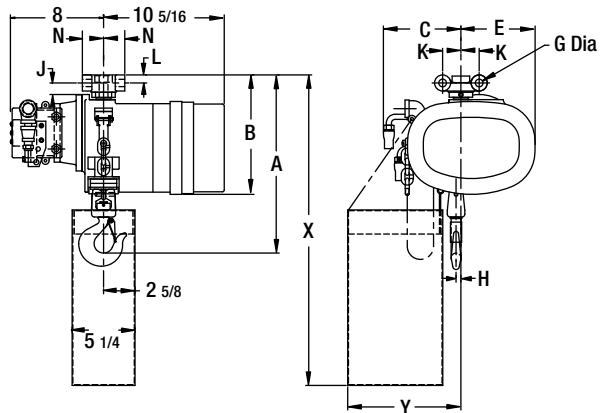

Lug Suspension Specifications & Dimensions

Capacity	Model	Hoist Catalog #	B	C	E	J	K	L	M	N	G	H	X	Y
tons			in	in	in	in	in	in	in	in	in	in	in	in
1/2	Lug / Spark	911693	15-1/4	6-5/8	6-3/8	1	1-9/16	1-11/16	10-13/16	1-13/16	5/8	7/16	26-9/16	9-11/16
1	Lug / Standard	911654 911651	15-1/4	6-5/8	6-3/8	1	1-9/16	1-11/16	10-13/16	1-13/16	5/8	7/16	26-9/16	9-11/16
	Lug / Spark	911694	21	7-15/16	5-1/16	1-11/16	2-1/2	1-7/8	11-1/8	2-3/16	1	3/16	27-1/2	11
2	Lug / Standard	911655 911652	21	7-15/16	5-1/16	1-11/16	2-1/2	1-7/8	11-1/8	2-3/16	1	3/16	27-1/2	11
	Lug / Spark	911695	23-5/16	9-3/8	7-1/8	3-1/16	3	1-1/4	12-7/8	3	1-1/4	1/4	29-1/4	12
3	Lug / Standard	911656 911653	23-5/16	9-3/8	7-1/8	3-1/16	3	1-1/4	12-7/8	3	1-1/4	1/4	29-1/4	12

Spark Resistant Models

Spark resistant hoists offer greater protection in hazardous environments. Components for spark resistance includes bronze alloy hooks with stainless steel hook latches, lower blocks of stainless steel on single part chain and aluminum on 2 and 3 part chain, chrome nickel non-magnetic stainless steel alloy load chain, bronze limit stop with aluminum limit actuators and modified sprocket and guide. A spark resistant chain container is recommended on 10 foot lift spark resistant hoists. Spark resistant chain containers are stainless steel.

The spark resistant KALC air hoists have lower speeds and are derated due to the use of stainless steel load chain. The lower wear life of stainless steel chain limits applications to medium-duty service.

When specifying lug suspended spark resistant hoists, care must be taken in the trolley selection to assure that the trolley fits the derated hoist lug. If this is your first purchase, consult the factory for assistance.

Yale Air Chain Hoist may be the best solution to your material-handling needs. Air hoists are ideal for many conditions that make electric hoists impractical. Yale Air Chain Hoists feature variable speed control, so expensive electrical controls are unnecessary.




Yale Air Hoist Advantages

- **Precise Load Spotting**
Lifting and lowering speeds are continuously variable from zero to maximum.
- **Operates In Extreme Heat**
The air hoist motor is designed for operation under conditions of relatively high ambient temperatures without need for special protection.
- **Higher Speeds**
For applications where speed is a critical factor in production, Yale air hoists provide very fast lowering speeds.
- **Free From Hazard of Electrical Shock**
Since compressed air is the power source, Yale Air Hoists have a distinct advantage over electrical shock hazards especially in wet locations.
- **Spark Resistant Features**
Spark resistant options allow air hoists to be used in areas where danger of combustion or explosion from atmospheric conditions exist.
- **Easier To Maintain**
There are no contactors, transformers, motor windings, fuses, etc. that are typical in electric hoists that need to be checked or replaced. As long as air going into the air motor is good and lubrication is supplied to the air motor, the Yale Air Hoist is very easy to maintain.



THE MOST FAMOUS NAME IN HOISTS.



Model YAL Air Hoists



- Pull cord control provides a lightweight, economical hoist for accurate control of loads.
- Pendant throttle control hoists offer ergonomic one-handed controls, for ease of operation.
- Inlet air swivel with built-in strainer provides free hoist movement.
- Aluminum frame and end cover contributes to the lightweight, easily portable, and rugged design.
- Heavy-duty shoe type brake is a proven design for stopping and holding loads in heavy-duty applications.
- External adjustment screws for decreased lift and lower speeds.
- External brake adjustment.
- Limit stops prevent over-travel in upper and lowering directions.
- Planetary gearing of alloy steel, heat-treated spur gears is accurately machined to provide a close meshed, compact gear reduction.
- Eight-vane motor provides high torque, smooth starting and excellent control.
- Tapped exhaust port 1/2 NPTF...for CLEAN applications or to add a supplemental muffler in addition to the built-in muffler for even quieter operation.

Basic Hoist Data

Rated Loads

1/4, 1/2, and 1-ton (Spark resistant models are rated at 3/8 and 3/4-ton).

Air Pressure Recommended
90 PSI

Air Consumption

48 SCFM at 90 PSI

Pendant Control Hose

6 foot length is standard. Longer lengths are available up to 72 ft. of lift.

Control

Pull cord or pendant throttle

Lift

10 foot lifts are standard. Longer lifts are also available.

Net Weight (Basic Hoist)

36 lbs.

Suspension

Hook or lug

Air Inlet Size

3/8 NPTF

Air Supply Hose Size


1/2 I.D. min.

Air Exhaust


1/2 NPTF

Hook & Lug Suspension Specifications

Type	Capacity	Pull Cord Control		Pendant Throttle Control		Parts of Load Chain	Lifting Speed Max**	Lowering Speed Max**
		Model #	Net Weight	Model #	Net Weight			
tons	tons		lbs.		lbs.	in	in	in
Hook Mount Trolleys								
Standard Models								
Roller Chain	1/4	2201	37	2202	47	1	65	95
	1/2	2203	37	2204	47	1	45	120
	1	2205	51	2206	61	2	23	60
Link Chain	1/4	2211	36	2212	46	1	65	95
	1/2	2215	36	2216	46	1	45	120
	1	2219	49	2220	59	2	23	60
Spark Resistant Models								
Link Chain	3/8	2241	36	2242	46	1	60	100
	3/4	2243	49	2244	59	2	29	52
Lug Mount Trolleys								
Standard Models								
Link Chain	1/4	2251	36	2252	46	1	65	95
	1/2	2255	36	2256	46	1	45	120
	1	2259	49	2260	59	2	23	60
Spark Resistant Models								
Link Chain	3/8	2281	36	2282	46	1	60	100
	3/4	2283	49	2284	59	2	29	52

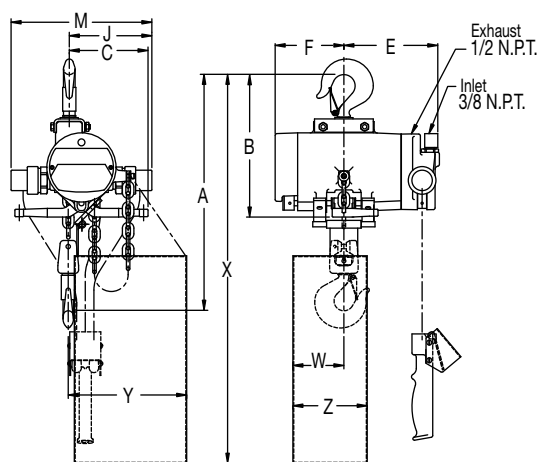

1/4 and 1/2 ton

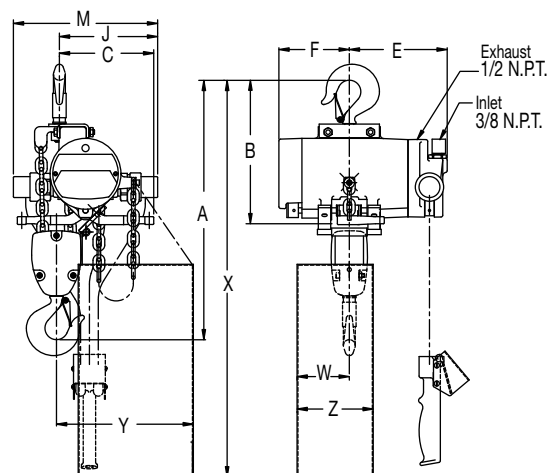


1 ton


Hook Suspension Specifications & Dimensions

Type	Capacity	Pull Cord Control Model #	Pendant Throttle Control Model #	A	B	C	E	F	J	M	W	X	Y	Z
tons	tons			in	in	in	in	in	in	in	in	in	in	in
Standard Models														
Roller Chain	1/4	2201	2202	15-1/4	10-1/4	4-3/4	7-1/16	5-1/16	6-15/16	10-3/16	3-5/8	30-1/8	8-9/16	5-1/4
	1/2	2203	2204	15-1/4	10-1/4	4-3/4	7-1/16	5-1/16	6-15/16	10-3/16	3-5/8	30-1/8	8-9/16	5-1/4
	1	2205	2206	18	10-1/4	5-3/4	7-1/16	5-1/16	6-15/16	10-3/16	3-5/8	30-1/8	9-11/16	5-1/4
Link Chain	1/4	2211	2212	15-1/4	10-1/4	4-3/4	7-1/16	5-1/16	6-15/16	10-3/16	3-5/8	30-1/8	8-9/16	5-1/4
	1/2	2215	2216	15-1/4	10-1/4	4-3/4	7-1/16	5-1/16	6-15/16	10-3/16	3-5/8	30-1/8	8-9/16	5-1/4
	1	2219	2220	18	10-1/4	5-3/4	7-1/16	5-1/16	6-15/16	10-3/16	3-5/8	30-1/8	9-11/16	5-1/4
Spark Resistant Models														
Link Chain	3/8	2241	2242	15-1/4	10-1/4	4-3/4	7-1/16	5-1/16	6-15/16	10-3/16	*	*	*	*
	3/4	2243	2244	18	10-1/4	5-3/4	7-1/16	5-1/16	6-15/16	10-3/16	*	*	*	*

* Spark resistant chain container dimensions can be found in the Air Hoist Accessories section of this brochure

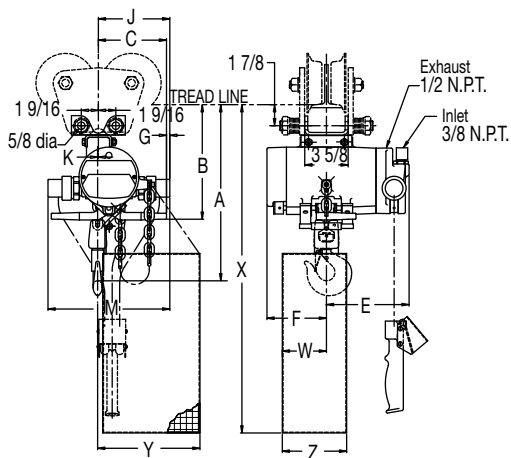

1/4 and 1/2 ton

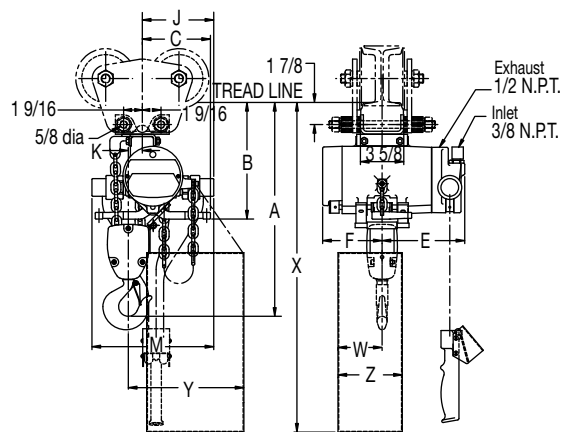

1 ton

Lug Suspension Specifications & Dimensions

Type	Capacity	Pull Cord Control Model #	Pendant Throttle Control Model #	A	B	C	E	F	G	J	K	M	W	X	Y	Z
tons	tons			in	in	in	in	in	in	in	in	in	in	in	in	in
Standard Models																
Link Chain	1/4	2251	2252	13-7/8	9-5/8	4-3/4	7-1/16	5-1/16	1-1/4	6	1/16	10-3/16	3-5/8	29-1/4	8-9/16	5-1/4
	1/2	2255	2256	13-7/8	9-5/8	4-3/4	7-1/16	5-1/16	1-1/4	6	1/16	10-3/16	3-5/8	29-1/4	8-9/16	5-1/4
	1	2259	2260	17	9-3/4	5-3/4	7-1/16	5-1/16	1/4	6	1-3/16	10-3/16	3-5/8	29-1/4	9-11/16	5-1/4
Spark Resistant Models																
Link Chain	3/8	2281	2282	13-7/8	9-5/8	4-3/4	7-1/16	5-1/16	1-1/4	6	1/16	10-3/16	*	*	*	*
	3/4	2283	2284	17	9-3/4	5-3/4	7-1/16	5-1/16	1/4	6	1-3/16	10-3/16	*	*	*	*

* Spark resistant chain container dimensions can be found in the Air Hoist Accessories section of this brochure